
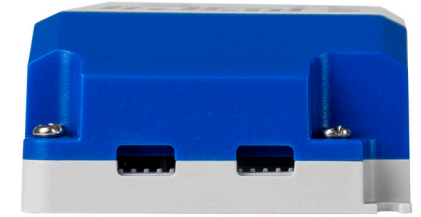


50w IP20 Triac Dimmable Constant Voltage LED Driver


Material	Plastic
Colour	White + Blue
IP Rating	IP20
Input Voltage	220 - 240v AC
Output Voltage	Available in either 12v DC or 24v DC
Max Wattage	50w (Recommended Max Wattage = 40w)
Protection Class	2 (No Earth Required)
Wiring	Parallel
Protections	Short Circuit, Overload, Over Temperature
Dimming Range	5% - 100%
Dimmable	Yes - Triac
Warranty	3 Years Replacement

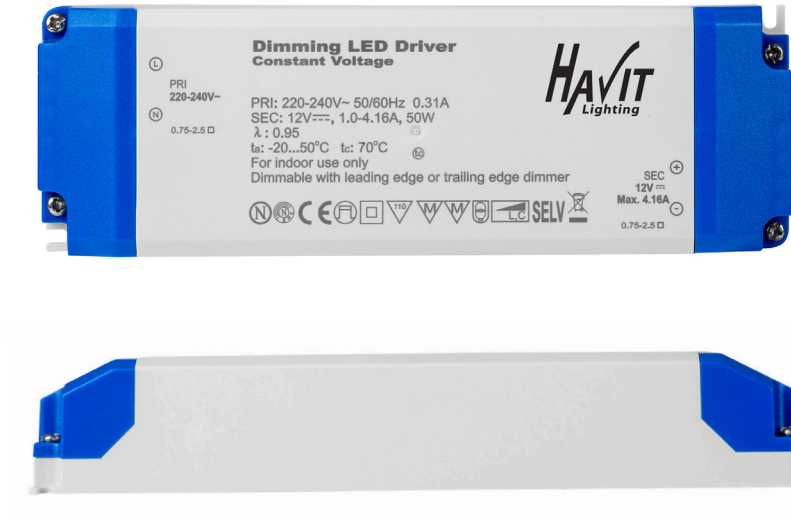


Product Ordering

Part Number	Output Voltage	Barcode
HV9668-12V50W	12v DC Constant Voltage	9350418027917
HV9668-24V50W	24v DC Constant Voltage	9350418027924

Sample Installation Diagram

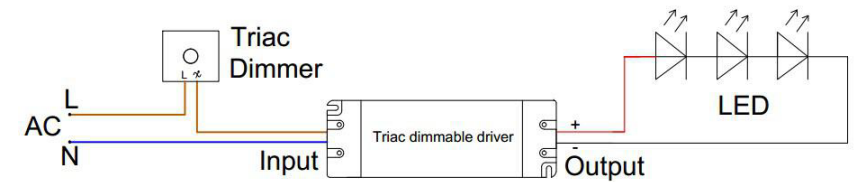

Dimensions

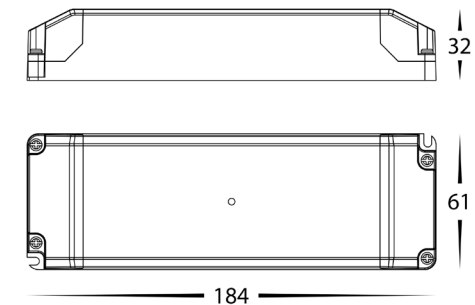

Website



Warranty
Terms & Conditions



		HV9668-12V50W	HV9666-24V50W
Output	DC Voltage	12v DC	24v DC
	Voltage Tolerance	± 0.5V	± 0.5V
	Rated Current	4.16A	2.08A
	Rated Power	50W	
	Line Regulation	± 1V	
	Set up time	2000ms, 50ms(at full load) 110V AC / 230V AC	
	Holding time (Typ.)	15ms(at full load) 110V AC / 230V AC	
	Ripple and Noise(max)	120mVp-p	240mVp-p
	Load Regulation	± 1%	
Input	Voltage range Note 2	220~240V AC	
	Frequency Range	47 - 63Hz	
	Power Factor (TYP) @ Full Load	PF ≥ 0.95 / 230V (at full load)	
	Efficiency(Typ.)@ Full Load	88%	
	AC Current (Max)	0.8A / 230V AC	
	Inrush Current (TYP)	45A, 50%, 175us	
	Leakage Current	<0.5mA / 240V AC	
Protections	Short Circuit	Hiccup mode, Recover automatically after fault condition is removed	
	Overload	≤ 120% shut down o/p voltage, re-power on to recover after fault condition is removed	
	Over Temperature	100°C ± 10°C shut down o/p voltage, re-power on to recover	
Environment	Working Temp.	Ta: -40°C ~ +60°C	
	Working Humidity	20%~90% RH, non-condensing	
	Storage TEMP. Humidity	-40°C ~+80°C, 10%~95% RH	
	TEMP. Coefficient	± 0.03%/°c (0-50°c)	
	Vibration	10~500Hz, 2G 12min./ 1 Cycle, Period for 72min, each along X,Y,Z axes	
Safety & EMC	Safety Standards	Compliance to EN61347-1, EN61347-2-13, AS/NZS61347-1, IP66 waterproof rating.	
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100Mohms/500Vdc 25°C /70%RH	
	EMC Emission	Compliance to AS/NZS CISPR15	
	EMC Immunity	Compliance to AS/NZS CISPR15	
Others	Weight	240g	

