


Nadia Garden Spike Light Installation Instructions



Product Specifications

Model No.	HV1459T-SS316	HV1459T-AB	HV1459T-BLK
Name	Nadia		
Material	316 Stainless Steel	Solid Brass	Aluminium
Colour	Stainless Steel	Antique Brass	Black
IP Rating	IP54		
Input Voltage	12v DC		
Lamp Base	Built in LED		
Lamp Wattage	1x 7w		
Colour Temp	3000k, 4000k, 5500k		
Lumens	500lm, 525lm, 550lm		
CRI	> 80		
Wiring	Parallel		
Dimmable	No		
Warranty	3 Years Replacement*		

Dimensions

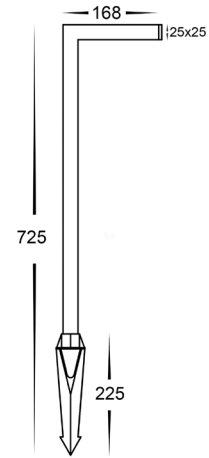

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- All electrical connections must be watertight, If a watertight connection is not done, Warranty will be voided.
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of voltage required and cannot be installed more than 25m from LED Driver, if not within this allowance warranty will be voided.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All 316 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on fitting. (Warranty does not cover Tea Staining).
- All o-rings and seals must be in place correctly to maintain warranty.
- These instructions may be updated at any time due to product improvements, Please visit website for most current installation instructions.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Attach spike to bottom of fitting by twisting clockwise.
3. Place fitting in desired location
4. Connect the cable -
5. Use an appropriate 12v DC LED Driver - DO NOT CONNECT LIGHT FITTING DIRECT TO 240V
6. Strip back cable on both fittings and cable run and twist the positive cable from fitting to positive on the cable run, then connect neutral from fitting to neutral on the cable run.
7. Solder all joins using solder with either a heat gun or butane gas torch.
8. Cover connections using an adhesive lined heat shrink or gel cap to make connection watertight. (failure to do this step will void warranty)
9. Heat the heat shrink or crimp the gel cap making sure all connections are covered.
10. Colour temperature is set to 3000k, To change remove cap to locate switch just inside fitting, Slide to select desired Colour Temperature, Reattach Cap making sure it is on tight to avoid any water penetration.
11. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



Additional Information

