





Divad Aluminium Black LED Garden Spike Light

Name	Divad
Material	Aluminium
Colour	Poly Powder Coated Black
IP Rating	IP65
Colour Temp	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black;"></div> 3000k <div style="width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black;"></div> 4000k <div style="width: 10px; height: 10px; background-color: #00CED1; border: 1px solid black;"></div> 5500k </div>
IK Rating	IK08
Installation Type	Ground - Spike
Diffuser Type	Clear Glass
Cable Length	2000mm
Spike Length	210mm
Lamp Base	Built in LED
Max Wattage	1x 5w
Protection Class	3 (No Earth Required)
Lamp Expectancy	<30,000hrs
CRI	CRI>80
Dimmable	No
Warranty	3 Years Replacement

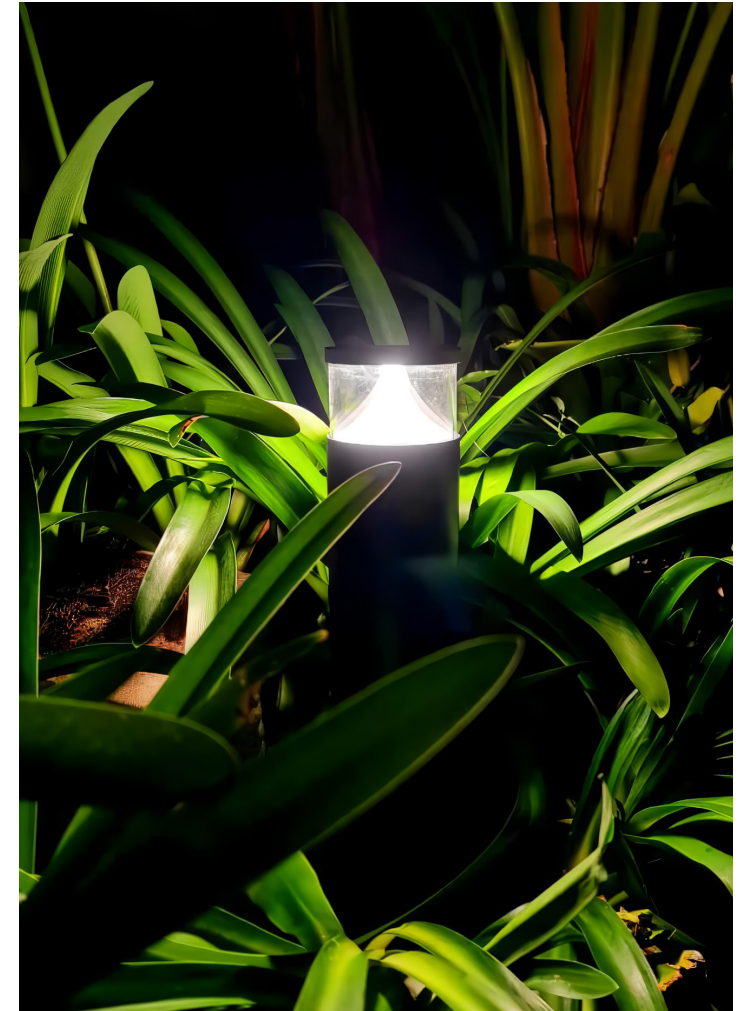

Dimensions

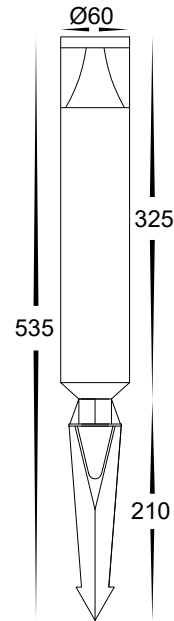


Warranty
Terms & Conditions

Website

Non-Dimming
Drivers

Product Ordering

Image	Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
	HV1488T-BLK	3000K 4000K 5500K	300lm 320lm 310lm	12v DC	120°	Built in LED	9350418036070

Image

Part Number

Colour Temp

Input Voltage


Beam Angle

Included LED



12v DC LED Drivers

See Catalogue or Website for full range of 12v DC LED Drivers



HV9911

Small IP67 Weatherproof Connector

HV9912

Medium IP67 Weatherproof Connector

HV9913

Large IP67 Weatherproof Connector