


Umina

Recessed wall light designed for high output compact fluorescent lamps.

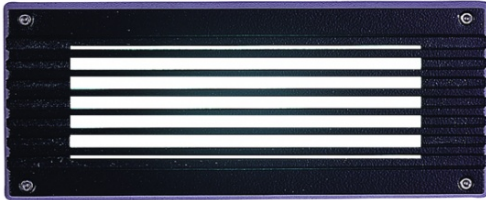

Specification

- Pressure die-cast construction in low copper aluminium alloy
- Polyester powder coat paint finish in textured RAL 9005 black
- Other colours to indent order
- Vandal resistant opal polycarbonate diffuser as standard
- Etched and toughened glass diffuser available on request
- Stainless steel exposed fasteners
- Silicone rubber seals provide IP55 weather resistance
- Installation blockout to be ordered separately
- Can be installed horizontally or vertically

Quick Spec

Pierlite Umina IP55 larger recessed wall light in die-cast LM6 aluminium with polycarbonate lens. Polyester powdercoat paint in RAL 9005 black, optional recessing well or glass diffuser.

Design Application

Recess into walls or columns to provide ambient lighting for entrances, stairways and along pathways.

Product Codes

Code	Version	Dim (mm)	Mass (kg)
UMA26805	26W PLC Open Face	300 x 130 x 135	2.0
UMA26905	26W PLC Horizontal Grille	300 x 130 x 135	2.0
UMA26005	26W PLC Vertical Louvre	300 x 130 x 135	2.0
UMA18904	18W PLC Horizontal Grille	300 x 130 x 135	2.0
UMA18804	18W PLC Open Face	300 x 130 x 135	2.0
UMA18004	18W PLC Vertical Louvre	300 x 130 x 135	2.0


Accessories

UMABLO	Installation Blockout
--------	-----------------------

Performance

UMA26805
LOR = 0.19

1 x TC-D 26W / 840
1 x 1800lm

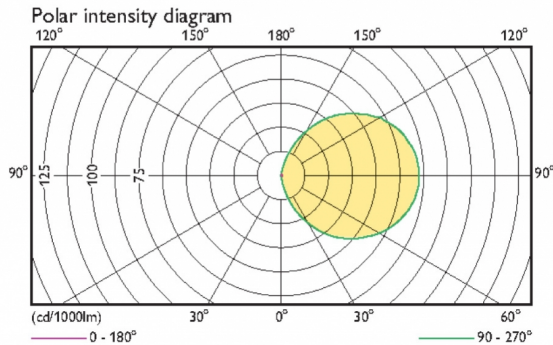

0°
max 160 = 107 cd
max 180 = 71 cd / 1000 lm
max 190 = 73 cd / 1000 lm

101805

Horizontal Illuminance

H (m)	E _{max} (lux)
3.0	4
3.5	3
4.0	2

