

# Futurix

A premium performance T5 weatherproof luminaire that is both functional and energy efficient.



## Specification

- Body moulded in glass reinforced polyester with neutral grey colour as standard
- Optional polycarbonate body in transparent clear or selected colours, available to indent order
- Injection moulded polycarbonate, prismatic diffuser cover
- Stainless steel lens retaining clips are supplied fitted to the body
- Designed for horizontal surface mounted installation or suspended using the optional installation clip accessories
- Lamp included
- Optional integral emergency versions available



## Quick Spec

Pierlite Futurix reinforced polyester body and polycarbonate diffuser with stainless steel clips. Optional ceiling mounting clips for IP65 installation. Modular gear tray with electronic T5 ballast.

## Design Application

Industrial areas, car parks, awnings, security lighting and general weatherproof applications where performance and energy efficiency are a criteria.

## Product Codes




Code	Version	Dim (mm)	Mass (kg)
FRX114	1 x 14W T5 c/w Lamp	665 x 84 x 98	2.7
FRX124	1 x 24W T5 c/w Lamp	665 x 84 x 98	2.7
FRX128	1 x 28W T5 c/w Lamp	1275 x 84 x 98	5.0
FRX135	1 x 35W T5 c/w Lamp	1575 x 84 x 98	5.5
FRX214	2 x 14W T5 c/w Lamp	665 x 134 x 98	2.8
FRX224	2 x 24W T5 c/w Lamp	665 x 134 x 98	2.8
FRX228	2 x 28W T5 c/w Lamp	1275 x 134 x 98	5.0
FRX154	1 x 54W T5 c/w Lamp	1275 x 134 x 98	5.0
FRX180	1 x 80W T5 c/w Lamp	1575 x 134 x 98	6.0
FRX228ME	2 x 28W T5 Maint. c/w Lamp	1275 x 134 x 98	5.5

## Accessories

FRX1LBRKT	FRX1LBRKT single lamp bracket set - 2 x brkts per set
FRX2LBRKT	FRX2LBRKT twin lamp bracket set - 2 x brkts per set

## Performance

FRX228 2 x T5 28W / 840  
2 x 2600 lm

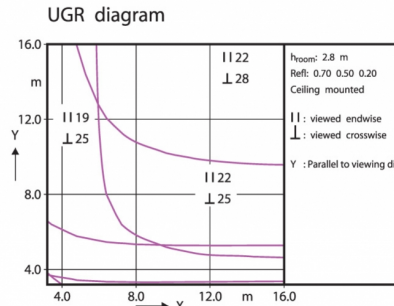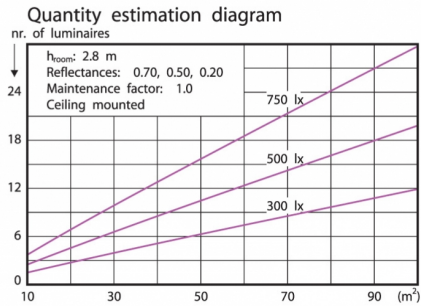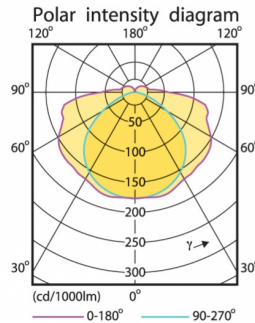

Utilisation factor table

Luminance Table

