




LED DOWNLIGHTS




www.sal.net.au

LED SHOP LIGHT


S9522TC, S9523TC EXMOUTH



DIMENSIONS S9522TC \varnothing 160 mm

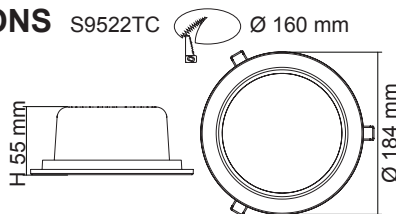

DIMENSIONS S9523TC \varnothing 195 mm

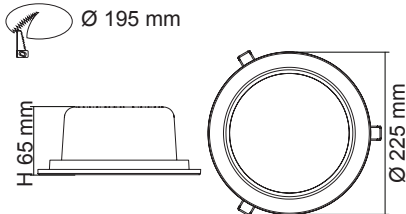

CONSTRUCTION


- Select colour temperature with DIP switch
- Twin 22W / 15W setting with DIP switch (S9522TC)
- Twin 40W / 28W setting with DIP switch (S9523TC)
- Die-cast aluminium body
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current LED driver included
- 1.2 m flex & plug fitted

DIP SWITCH

- Twin wattage setting with DIP switch

DIP SWITCH

- Select colour temperature with DIP switch

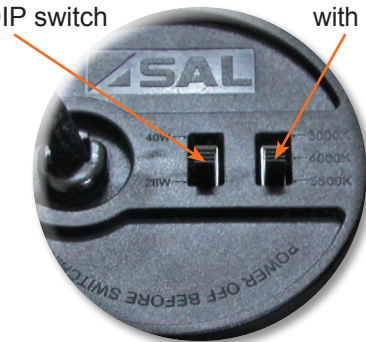

IP RATING

- IP20 suitable for indoor use only

DIMMING OPTIONS

- Analogue dimming (Trailing edge, 1-10V dimming)
- Digital dimming (DSI, DALI)

APPLICATIONS



- Retail
- Conference Rooms
- Reception areas

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Dimmable	Fitting Colour
S9522TC WH	240V	22W / 15W	2100lm/1500lm	3000K/4000K/5500K selectable	>80	105°	No	White
S9522TC SL	240V	22W / 15W	2100lm/1500lm	3000K/4000K/5500K selectable	>80	105°	No	Silver
S9523TC WH	240V	40W / 28W	3800lm/2800lm	3000K/4000K/5500K selectable	>80	105°	No	White
S9523TC SL	240V	40W / 28W	3800lm/2800lm	3000K/4000K/5500K selectable	>80	105°	No	Silver

PHOTOMETRIC DATA Unit: cd C0/C180 — C90/C270 —

S9522TC

S9523TC



Specifications above are for reference only and may vary without prior notice