


SMART DIMMER

SDD350BT



DIMENSIONS

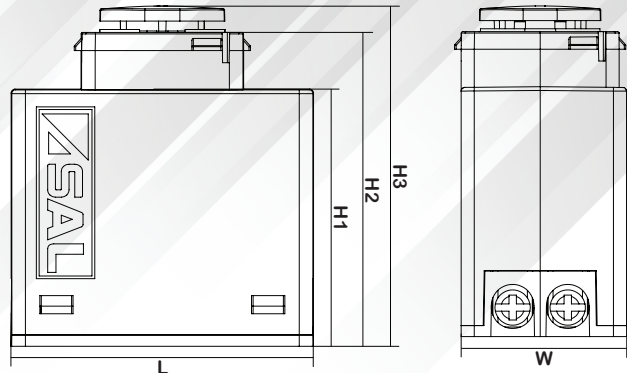

FEATURES: STANDALONE

- Dimming with memory function
- Settable minimum dim level

FEATURES: WHEN USED IN CONJUNCTION WITH THE "PIXIE" APP



- **TIMER FUNCTION:** set dimmers or dimmer groups to remain on for set time period and fade over required period
- **SCHEDULE FUNCTION:** set dimmers or dimmer groups to turn off, turn on or fade at set times and days of the week
- **GROUP FUNCTION:** group dimmers together into dimmer groups
- **SCENE FUNCTION:** set up a range of dimming level scenarios (scenes) by individual dimmers, or dimmer groups


SPECIFICATION

- Fit most branded switch plates. 1, 2 or 3 gang
- Overheating, overload and full short circuit protection
- SMART LED indicator
- Trailing edge phase cutting dimming
- Complies to AS/NZS 60669.2.1
- Retentive terminal screws and loop terminal

TYPICAL WIRELESS RANGE

- 20 m dependant on working environment

WIRING DIAGRAM

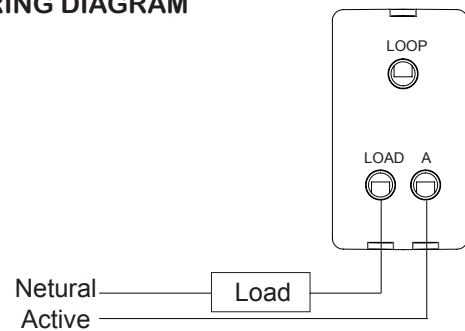

Model No.	Input	Frequency	Max. Load	Min. Load	Dimensions (L x H1/H2/H3 x W)	Operating temp.
SDD350BT	240V	50Hz/60Hz	350W	2W*	40 x 34 x 41.5 x 45 x 22.5 mm	-20~40°C

*Dimming performance will be affected when the load is less than 2W. (At 25°C)

Scan QR code or go to App store (IOS) or Google Play (Android) to download the free PIXIE app to your smart phone.



IOS: Requires IOS 6.0 or later. Compatible with iPhone, iPad and iPad touch

Android: Requires Android 4.4 or above, devices must support Bluetooth 4.0

