

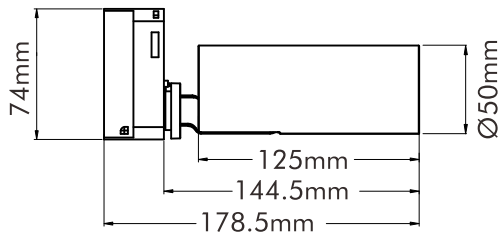


# LED TRACK LIGHT-TH18LED


- Flicker free design
- Tick-Lock adopted inside the track arm
- triac dimmable internal driver
- Tick mark on the track arm states precise directions for users
- Two-stage driver solution, THD<10, PF> 0.95, UGR<19
- Uses die-casting aluminum in heatsink
- Anti-glare rings is optional in white, black and golden

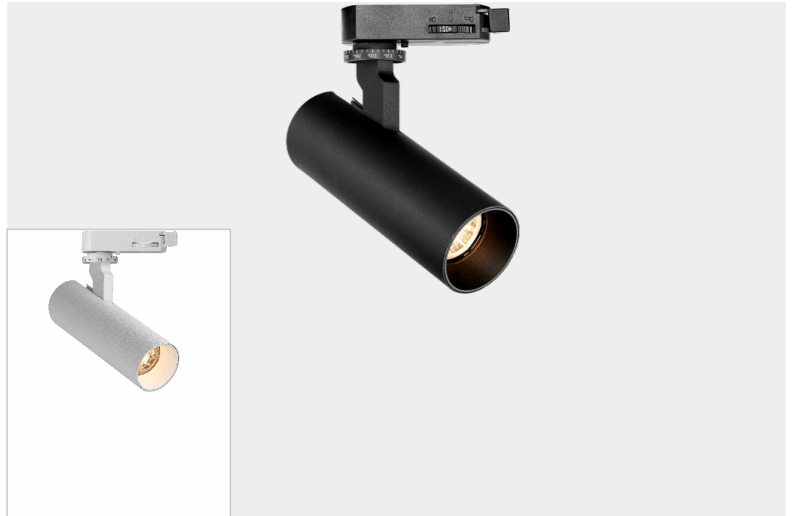


3000K




SDCM: 4.2 SDCM

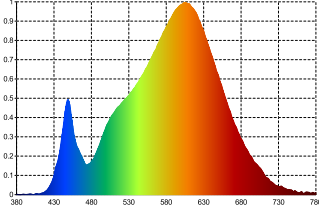


4000K



SDCM: 2.1 SDCM

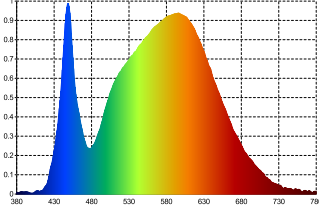

Model	TH18LED
Power	15W
LED	Bridgelux COB LED
PF value	>0.95
Track System	1 Phase/3 Phase
CRI	80+/90+
Dimmable	Yes
Warranty	3 years
Lifespan	>40,000Hrs
Inner box	L95*W70*H219mm
Carton	25pcs/CTN
Carton Size	L49*W36.5*H24CM
Carton Weight	11.2kg



Model	Housing Color	Voltage	Beam Angle	CCT	Optics	Lumen	Efficiency
TH18LED/WH/WW	White	200-240V 50/60Hz	60°	3000K	Lens	850lm	85lm/w
TH18LED/WH/NW	White	200-240V 50/60Hz	60°	4000K	Lens	900lm	90lm/w
TH18LED/BLK/WW	Black	200-240V 50/60Hz	60°	3000K	Lens	850lm	85lm/w
TH18LED/BLK/NW	Black	200-240V 50/60Hz	60°	4000K	Lens	900lm	90lm/w