



This product must be installed by a licensed electrician

Features

- Wi-Fi (No hub required)
- Fits comfortably through a downlight cut-out as small as 90mm (if rear cover “snap off” sections are removed)
- White, UV resistant material
- Combination head screws
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



Network/Device Requirements

Connectivity	Wi-Fi
Requirements	Existing 2.4GHz Wi-Fi network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)


Included Accessories

Rear clip-on cover, Reset pin

Technical Specifications

Supply Voltage	220 - 240V a.c. 50Hz
Standby Wattage	<1W
Operating Load	2400W (max)
Switched Poles	Active
IP Rating	IP20 (indoor use only)
Terminal Size	6mm ² (can fit up to 3 x 2.5mm ² wires per terminal)
Colour	White
Rear Colour	Clear
Housing Material	Polycarbonate
Contact Material	Brass
Weight	100g
Dimensions	95mm x 73mm x 58mm (including rear cover)
Mounting Centres	50mm
Compliance / Standards	AS/NZS 4268, AS/NZS 3100, AS/NZS 3112, AS/NZS 3133, CISPR 32

Terminal Diagram

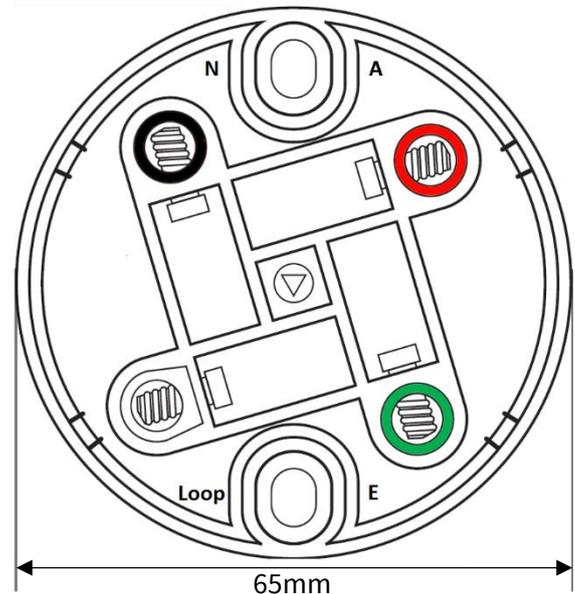

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

