



This product must be installed by a licensed electrician

Features

- Zigbee 3.0 compliant
- Fits comfortably through a downlight cut-out as small as 90mm (if rear cover “snap off” sections are removed)
- White, UV resistant material
- Combination head screws
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



Network/Device Requirements

Connectivity	Zigbee
Requirements	Mercator Ikuü zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)


Included Accessories

Rear clip-on cover, Reset pin

Technical Specifications

Supply Voltage	220 - 240V a.c. 50Hz
Standby Wattage	<0.05W
Operating Load	2400W (max)
Switched Poles	Active
IP Rating	IP20 (indoor use only)
Terminal Size	6mm ² (can fit up to 3 x 2.5mm ² wires per terminal)
Colour	White
Rear Colour	Clear
Housing Material	Polycarbonate
Contact Material	Brass
Weight	100g
Dimensions	95mm x 73mm x 58mm (including rear cover)
Mounting Centres	50mm
Compliance / Standards	AS/NZS 4268, AS/NZS 3100, AS/NZS 3112, AS/NZS 3133, CISPR 32

Terminal Diagram

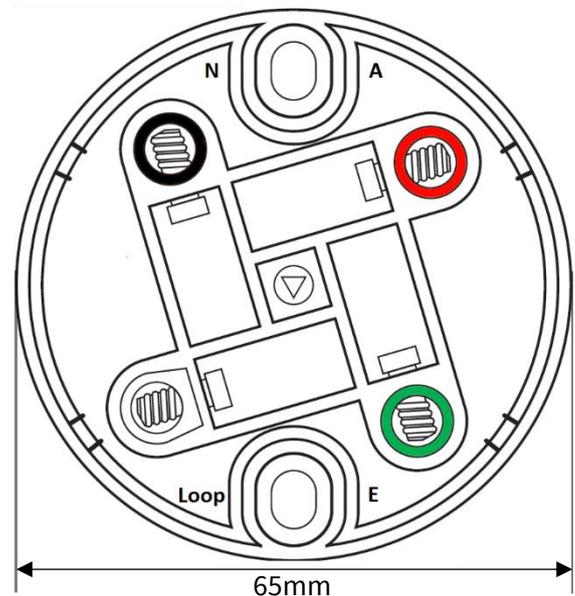

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.